

40037273 - 4220014

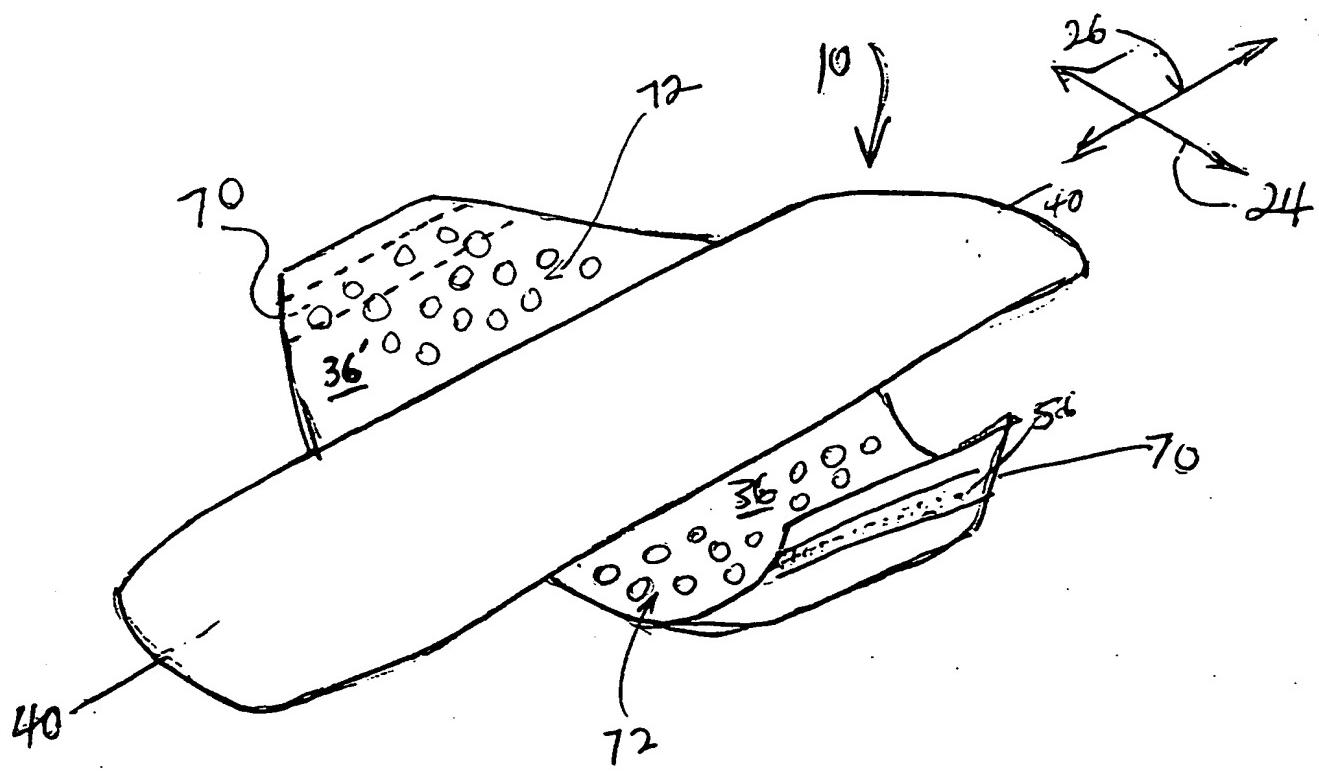


FIG. 1A

4,000,327-6-1220014

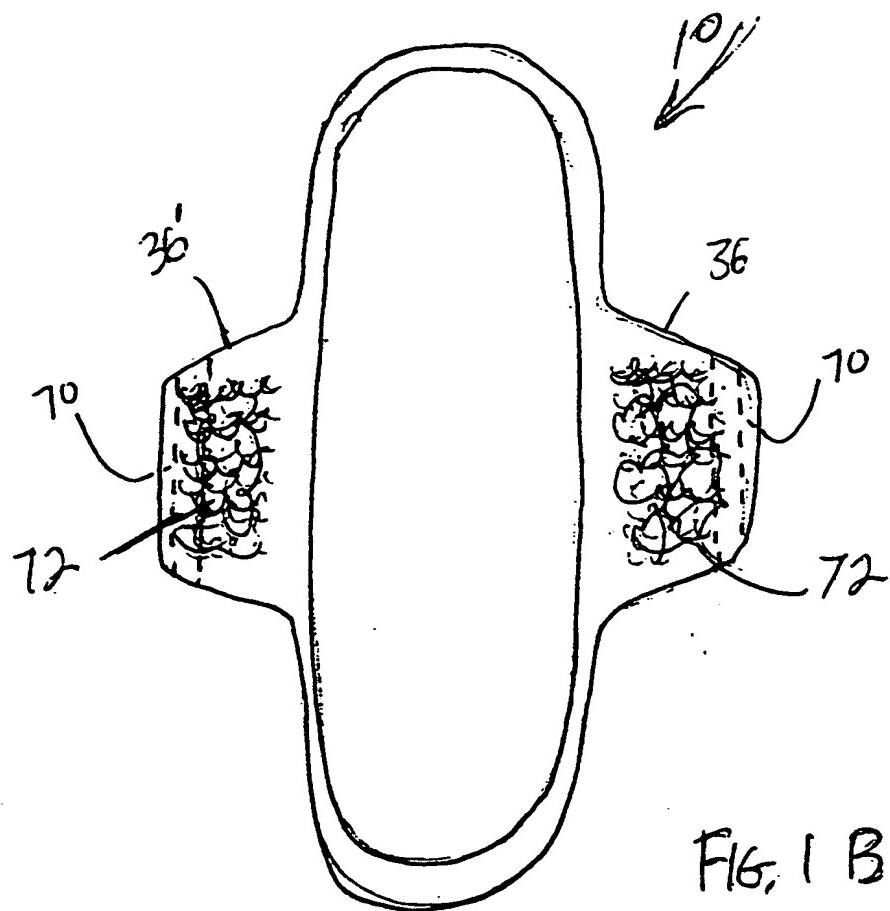


FIG. 1 B

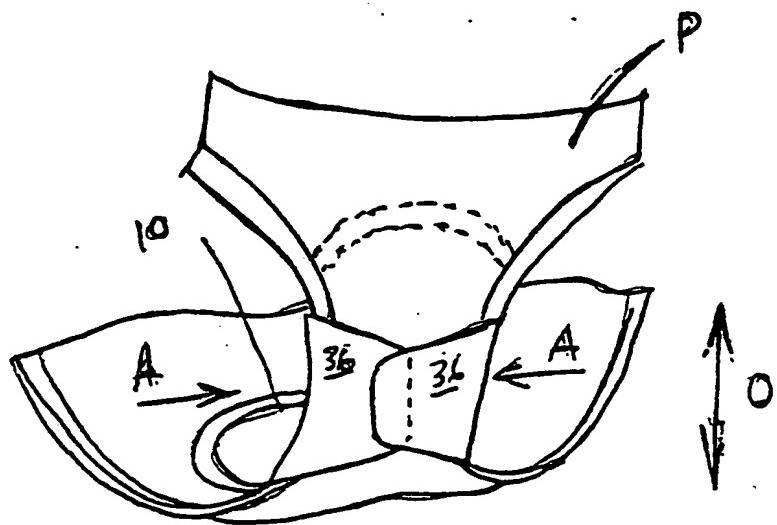


FIG. 1 C

60112237 - 8222X2100

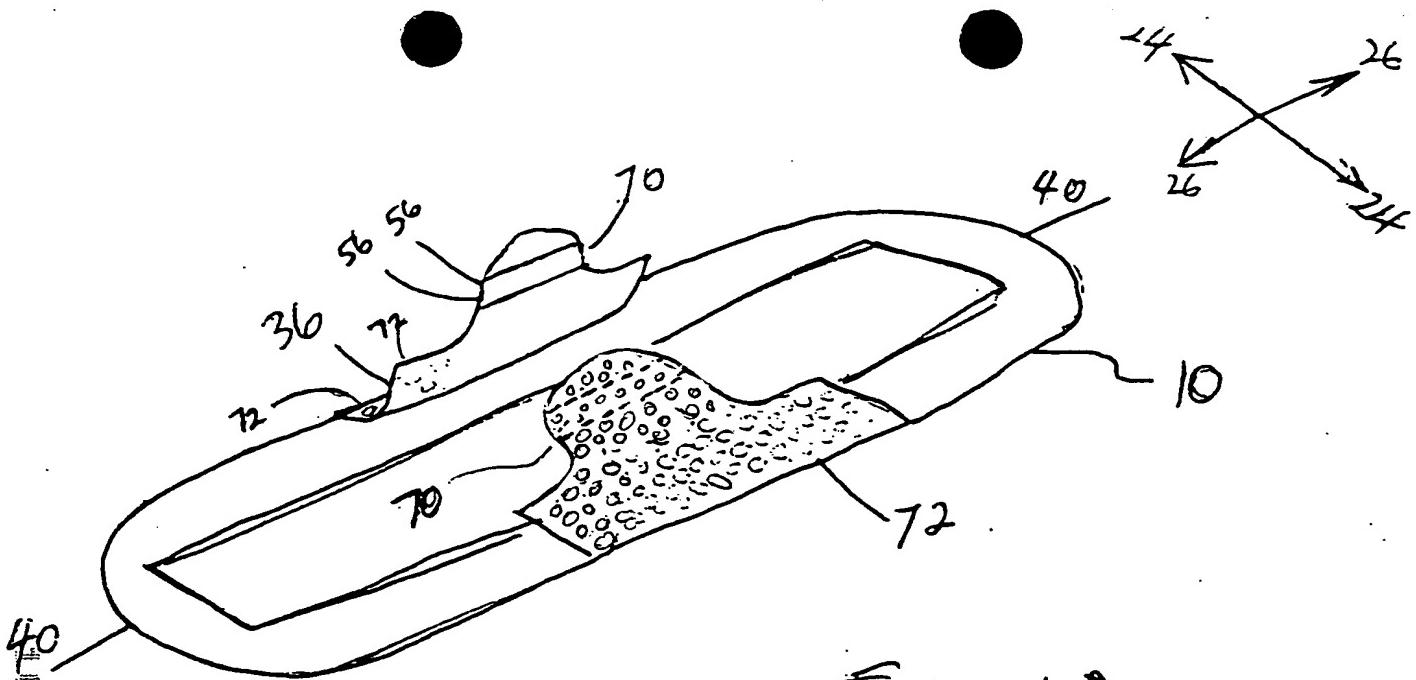


FIG. 1 D

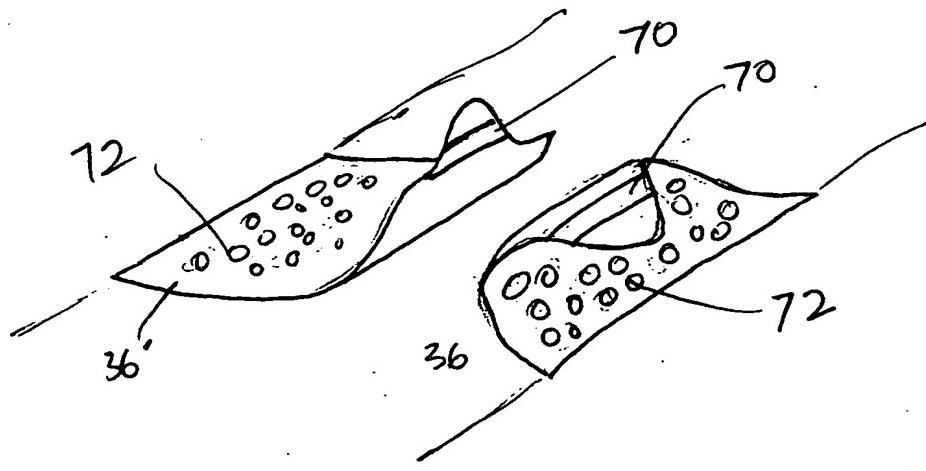


FIG. 1 E

4003228 - 122004

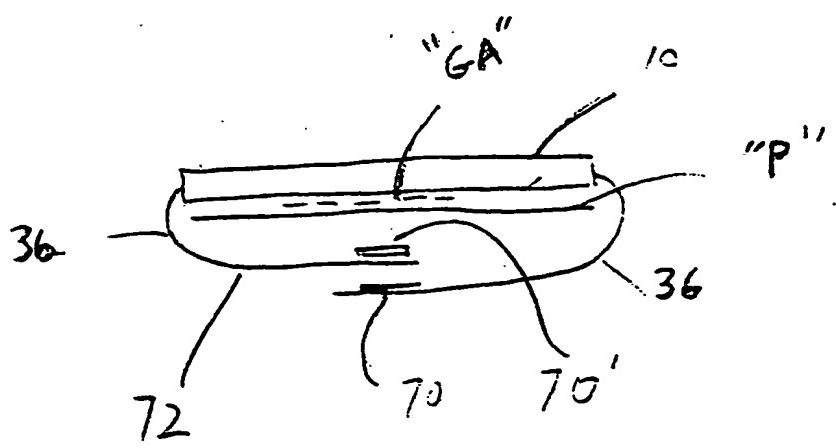


FIG. 1F

100257-822600T

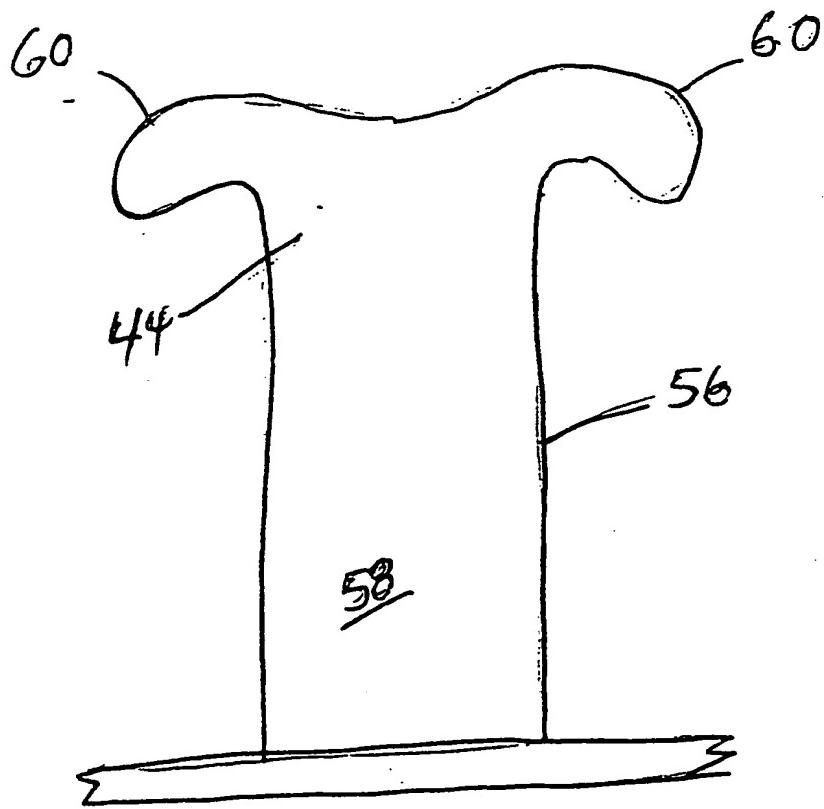


FIG. 2A

P002207 = 8225007

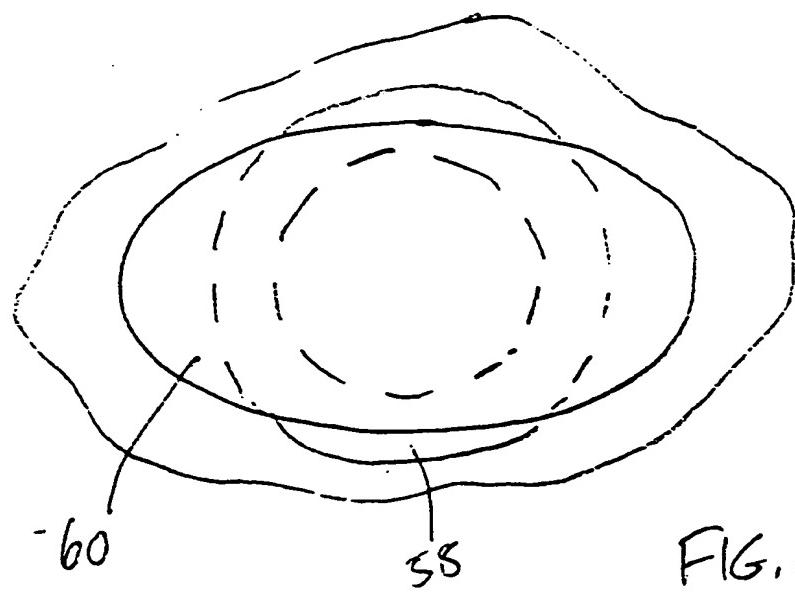


FIG. 2B'

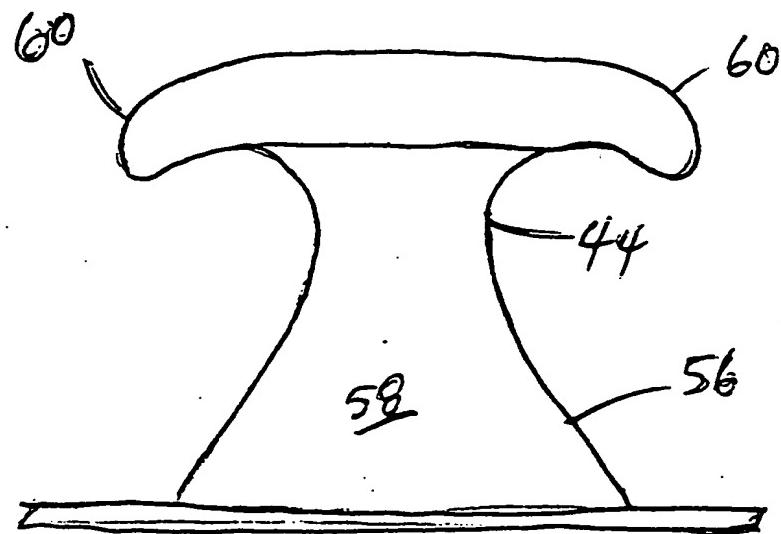


FIG. 2B

1003278.12001

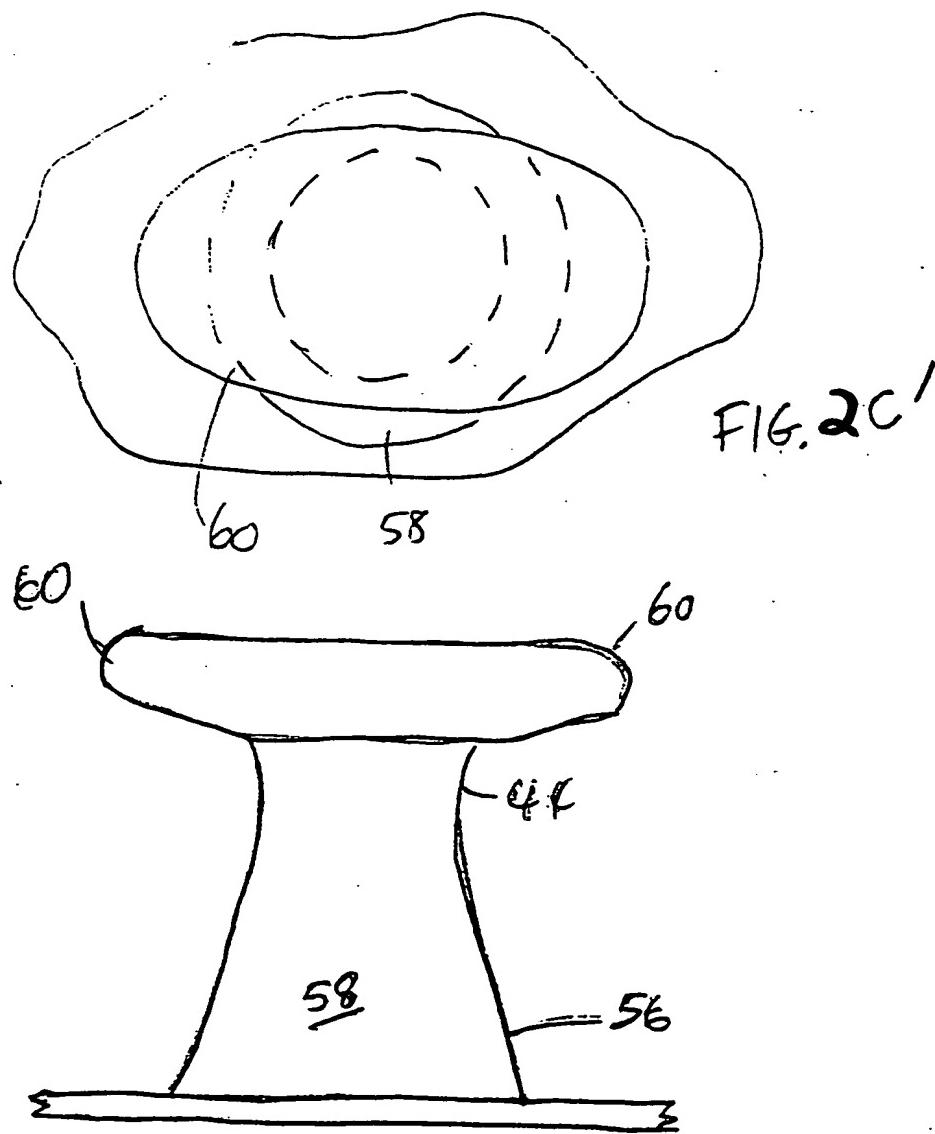


FIG. 2C

100-321-0001

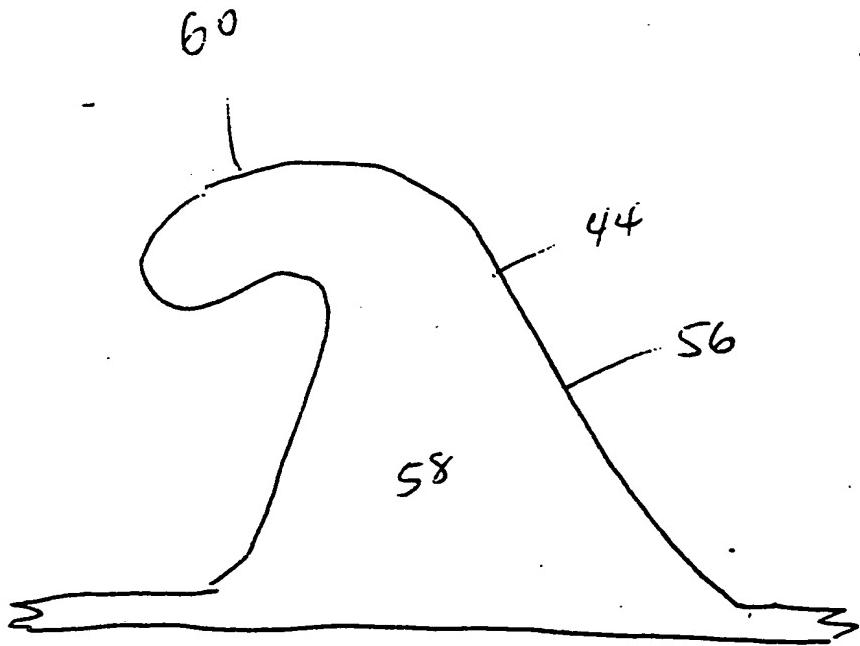


FIG. 20

4003278-12200

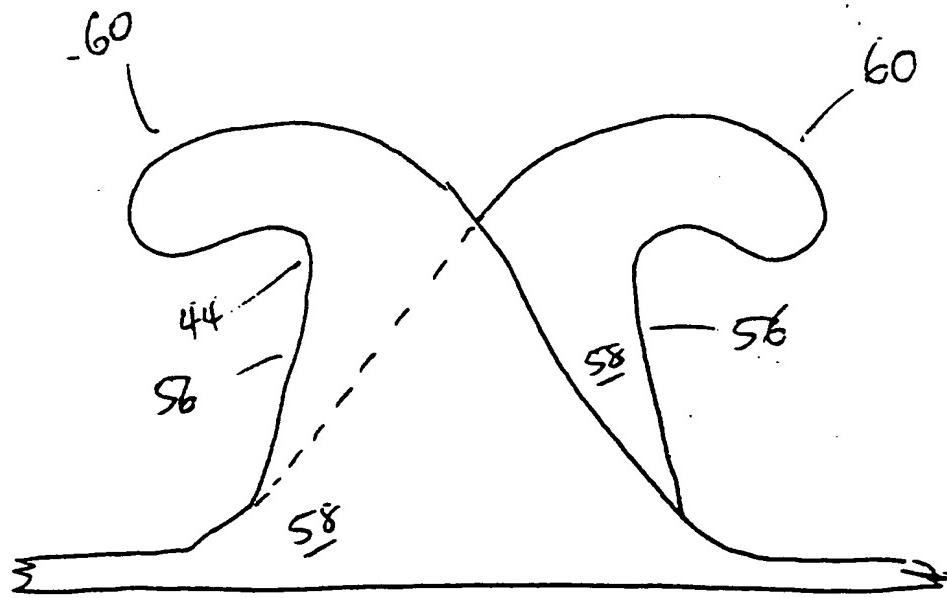


FIG. 2E

Mechanical Fastening Performance

Standard Peel Data

Two Hook Orientations


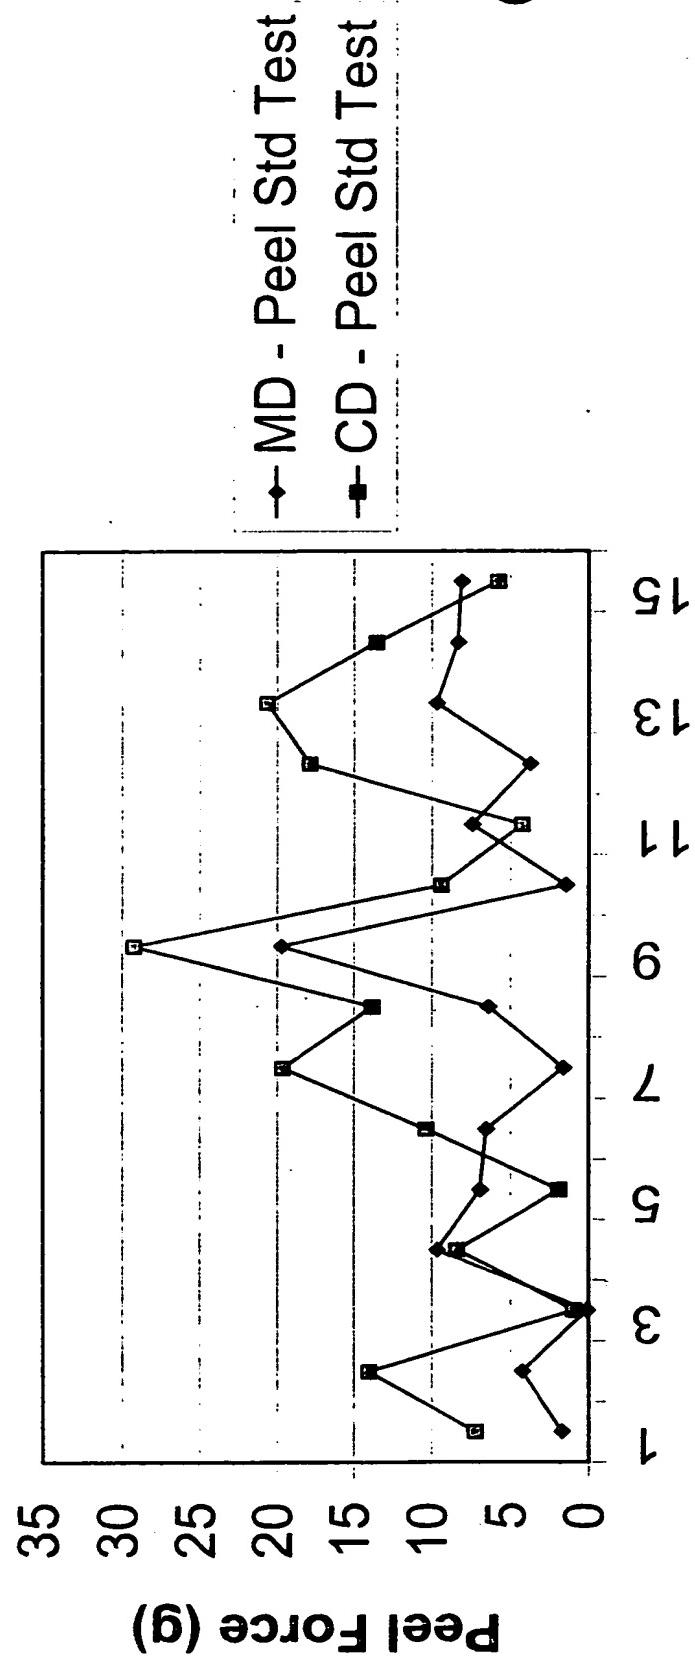


Fig. 3A
Sample ID

Mechanical Fastening Performance

Standard Shear Force

Two Hook Orientations

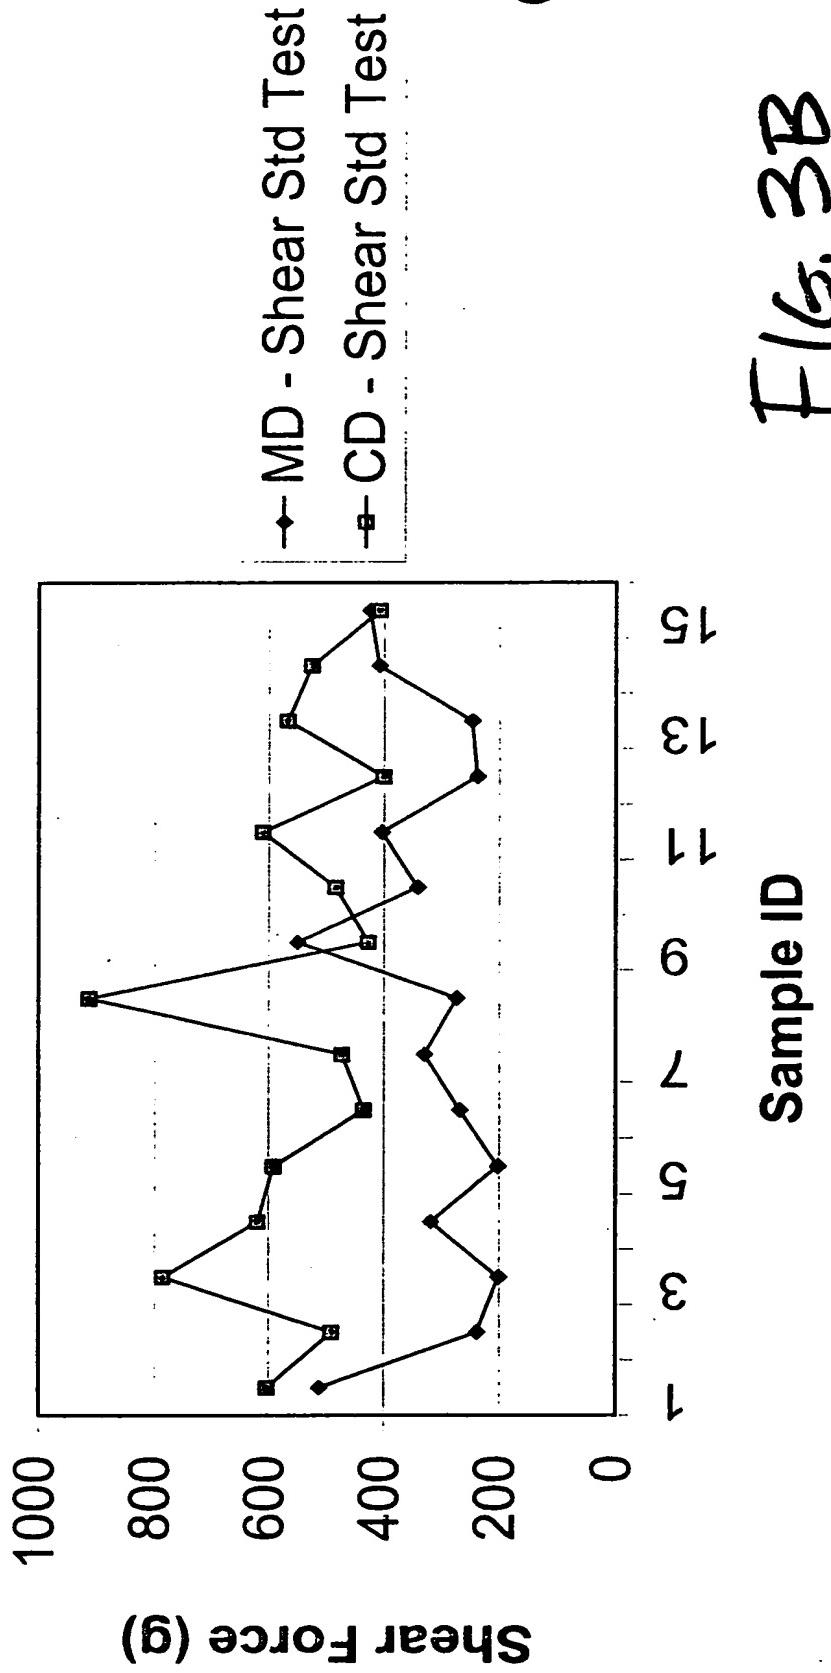

F16. 3B

Mechanical Fastening Performance

Peel Force Post Wear

Two Hook Orientations

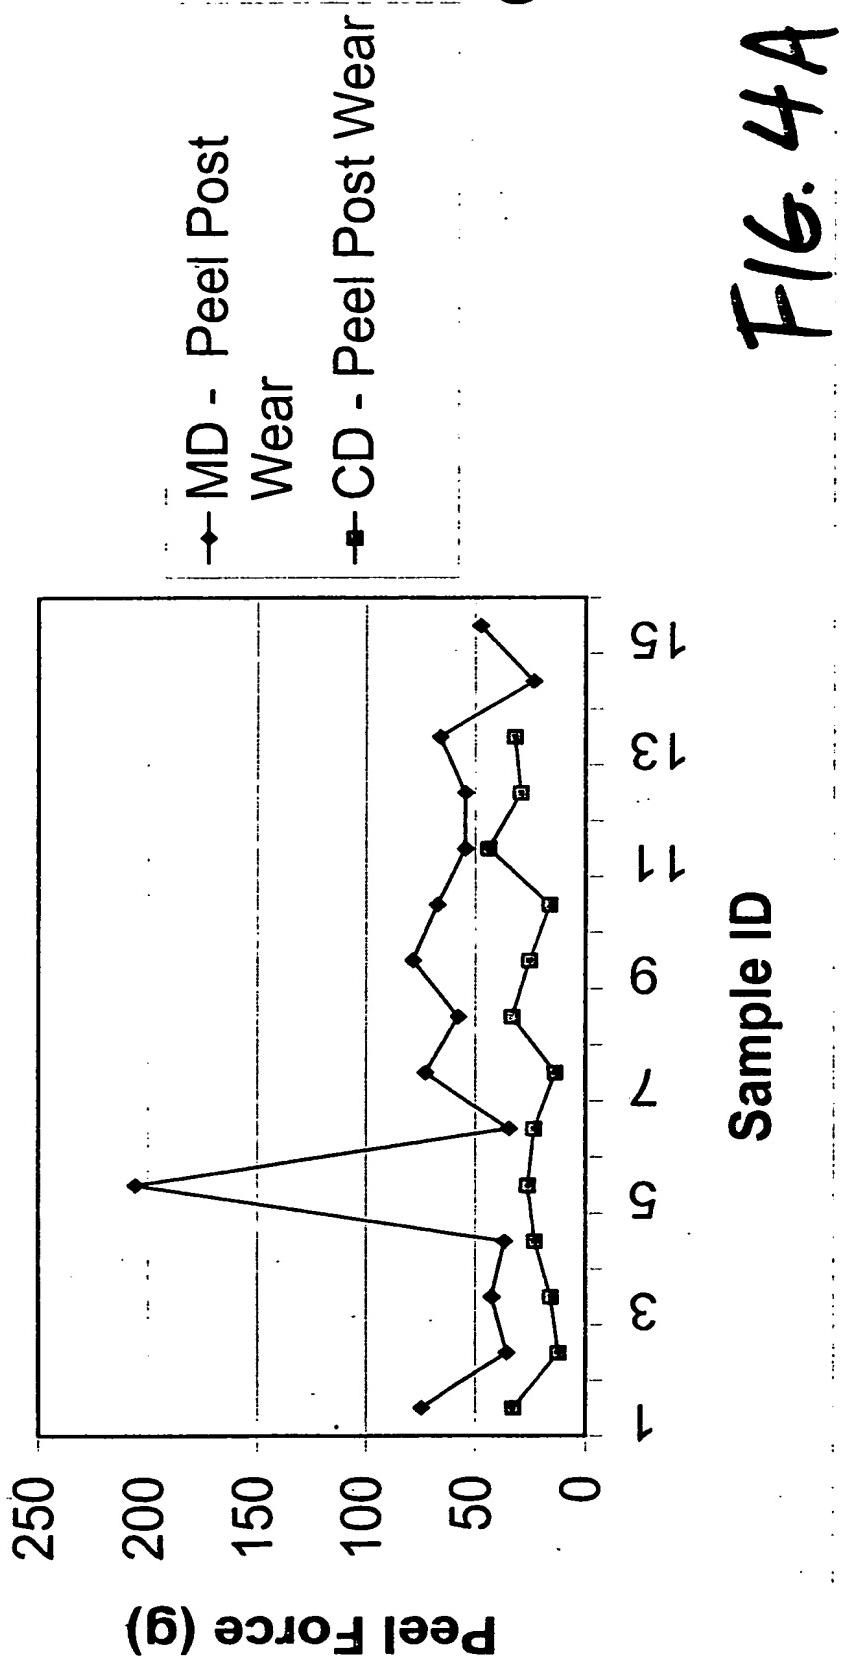


Fig. 4A

Mechanical Fastening Performance
Shear Force Post Wear
Two Hook Orientations

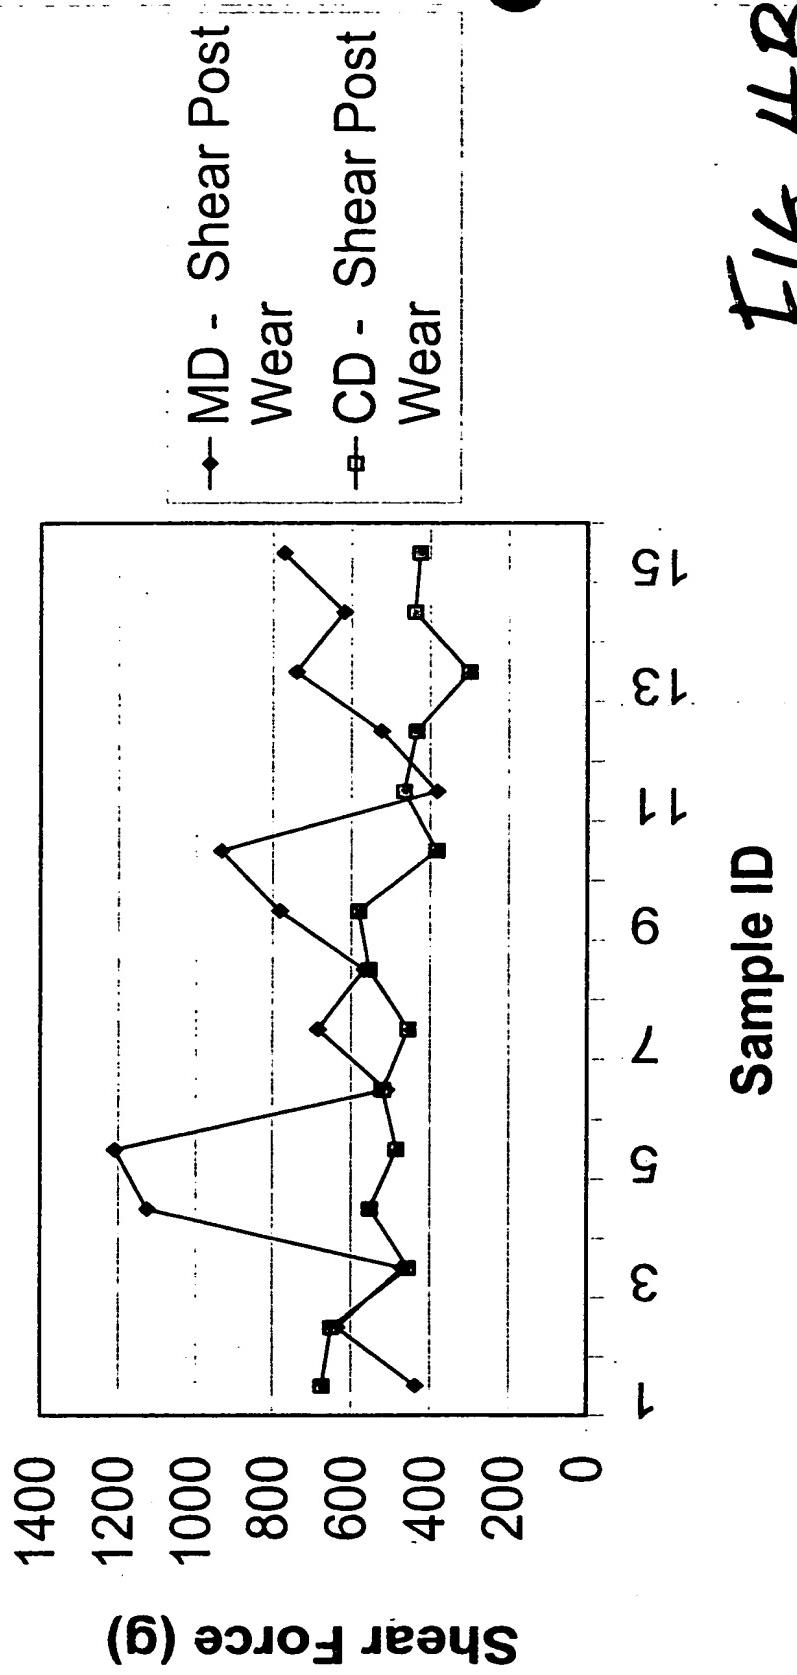


Fig. 4B

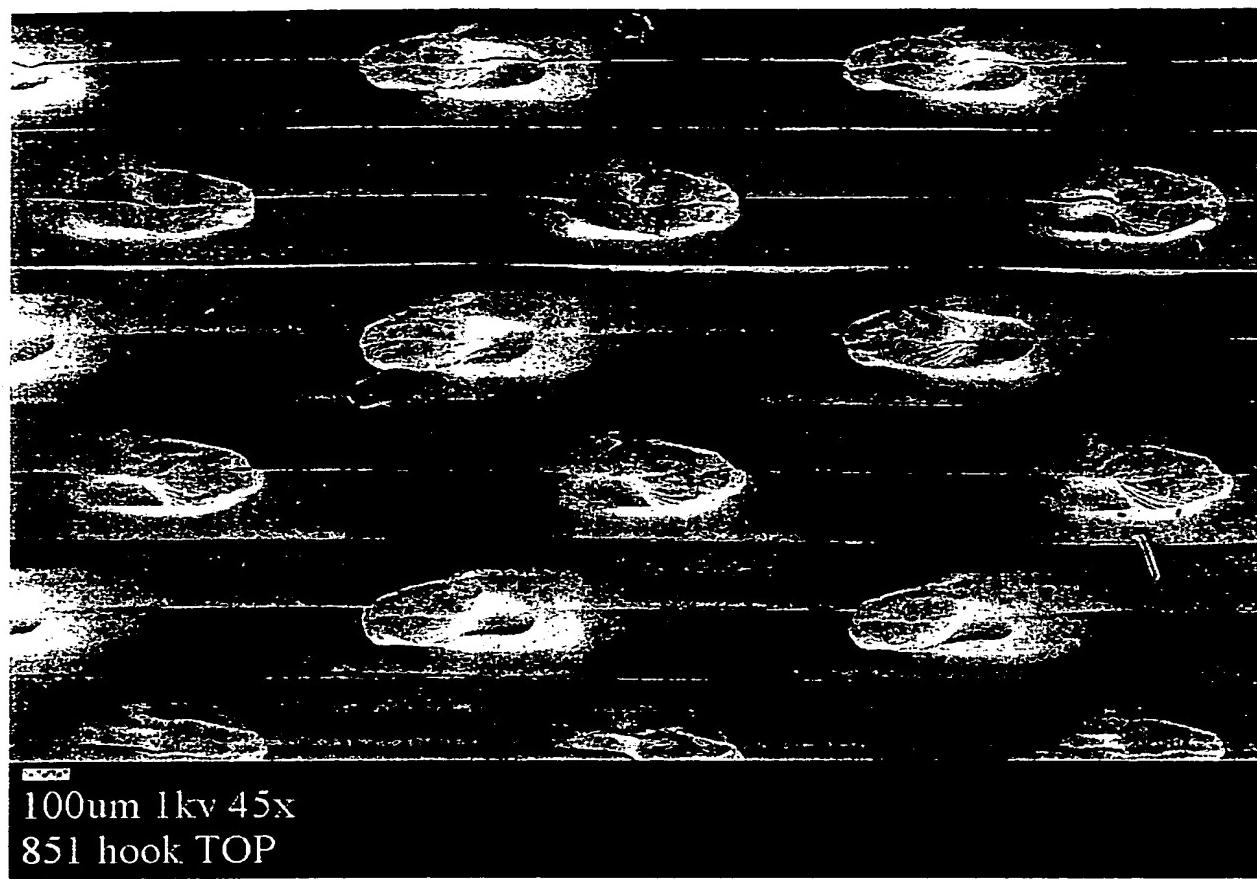



FIG. 5A



100um 1kv 50x
851 hook obl.

FIG. 5B

FIGURE 6

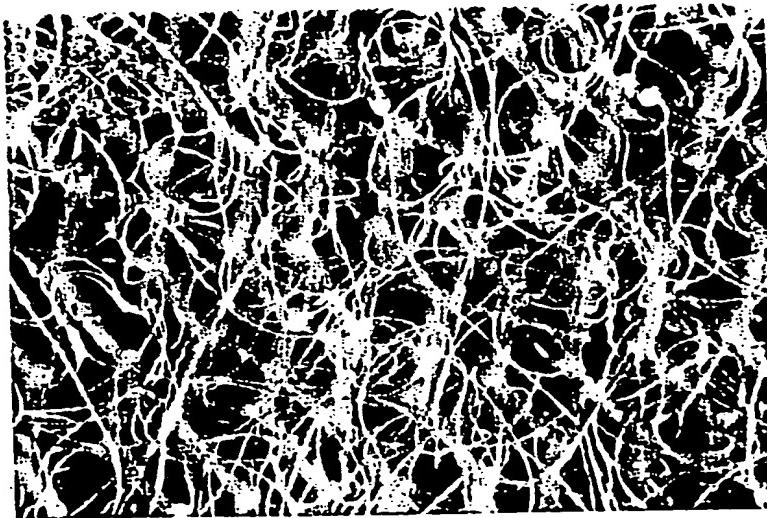

Guilford Woven Loop

FIG. 6



Nonwoven PUB Loop Dots

FIG. 7